



# COX -LINE

COX-LINE同轴音箱采用同芯同磁结构；在声音上有着极好的清晰度，结构非常紧凑，体积小，声压大，造型美，配置吊挂架可以满足产品的垂直和水平安装；对于室内扩声，中小型场所的补声，会议室扩声有着广泛的使用范围。

With the coaxial and co-magnetic structure, the 8" / 12" coaxial loudspeaker can produce sound with an excellent articulation. It is characterized by compact configuration, small size, high SPL and appealing design. The mounting bracket is used for both horizontal and vertical installation. It has been widely used in medium and small-scale venues for indoor sound reinforcement.



The Sound  
Experience

# COX 8 / COX 12

8" / 12" Coaxial two way passive full range loudspeaker



8" / 12"同轴音箱采用同芯同磁结构；在声音上有着极好的清晰度，结构非常紧凑，体积小，声压大，造型美，配置吊挂架可以满足产品的垂直和水平安装；对于室内扩声，中小型场所的补声，会议室扩声有着广泛的使用范围。

With the coaxial and co-magnetic structure, the 8" / 12" coaxial loudspeaker can produce sound with an excellent articulation. It is characterized by compact configuration, small size, high SPL and appealing design. The mounting brackets is used for both horizontal and vertical installation. It has been widely used in medium and small-scale venue for indoor sound reinforcement and complement.



## 1 应用领域 Application

- 会议室
- 多功能厅,小型扩声
- Conference room
- Multifunctional hall, Small-scale sound reinforcement

## 2 曲线图 Graph

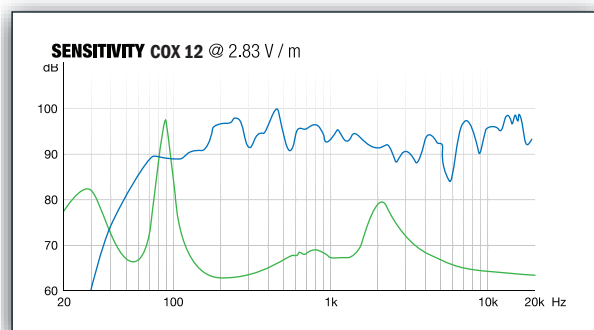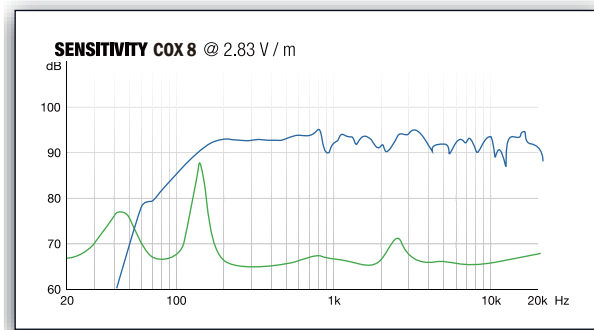

## 3 结构图 Structural diagram

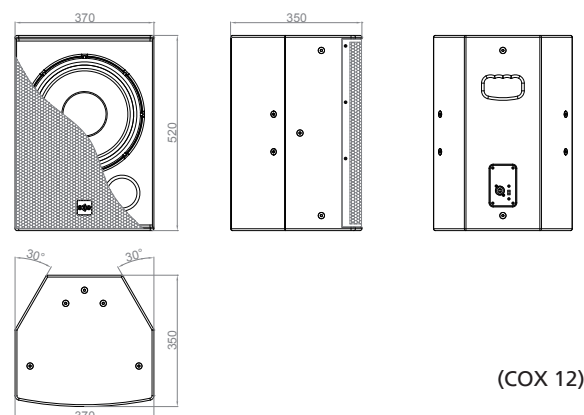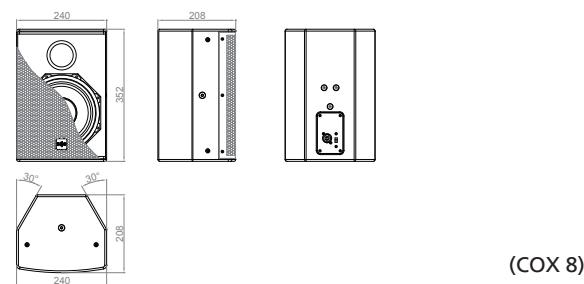

## 4 参数规格 Specification

型号名称: <b>COX 8</b>	Model: <b>COX 8</b>
类型: 8"无源同轴二分频全频音箱	Type: 8" coaxial two way passive full range loudspeaker
频率范围 (-6 dB): 80 Hz - 20 kHz, 带高频-3 dB衰减选择开关	Frequency response (-6 dB): 80 Hz - 20 kHz, with -3 dB high-frequency attenuation switch
功率 (额定/峰值): (IEC)180 W / 720 W (AES) 250 W / 1000 W	Power handling (RMS. / Peak): (IEC) 180 W / 720 W (AES) 250 W / 1000 W
灵敏度 (1 W / 1 m): 95 dB	Sensitivity (1 W / 1 m): 95 dB
最大声压级 (1 m): 125 dB	MAX SPL (1 m): 125 dB
阻抗: 8 Ω	Impedance: 8 Ω
指向角度 (水平 × 垂直): 90° × 90°	Dispersion (H × V): 90° × 90°
低音单元: 8"铁氧体单元, 2"音圈	LF Unit: 8" ferrite magnet, 2" voice coil
高音单元: 1.75"铁氧体PEN压缩同轴单元	HF Unit: 1.75" ferrite PEN film compression unit
保护: 高音保护	Protection: Tweeter protection
输入接口: 1 × Neutrik NL-4 pins +1 / -1 input pins +2 / -2 THRU	Input interface: 1 × Neutrik NL-4 pins +1 / -1 input pins +2 / -2 THRU
吊挂系统: 8个M5吊挂点, 3个M6吊挂点, 6个M8吊挂点	Rigging system: 8× M5 rigging point, 3× M6 rigging point, 6× M8 rigging point
箱体材料/喷漆: 12 mm多层板 / 水性漆	Cabinet material / Coating: 12 mm selected plywood / Water borne texture coating
尺寸 (W × H × D): 240 × 352 × 208 mm	Dimensions (W × H × D): 240 × 352 × 208 mm
净重: 7.8 kg	Net weight: 7.8 kg
可选附件: 见附件页面	Available accessory: See accessories page

型号名称: <b>COX 12</b>	Model: <b>COX 12</b>
类型: 12"无源同轴二分频全频音箱	Type: 12" coaxial two way passive full range loudspeaker
频率范围 (-6 dB): 50 - 20 kHz, 带高频-3 dB衰减选择开关	Frequency response (-6 dB): 50 - 20 kHz, with -3dB high-frequency attenuation switch
功率 (额定/峰值): (IEC) 300 W / 1200 W (AES) 400 W / 1600 W	Power handling (RMS. / Peak): (IEC) 300 W / 1200 W (AES) 400 W / 1600 W
灵敏度 (1 W / 1 m): 97 dB	Sensitivity (1 W / 1 m): 97 dB
最大声压级 (1 m): 128 dB	MAX SPL (1 m): 128 dB
阻抗: 8 Ω	Impedance: 8 Ω
指向角度 (水平 × 垂直): 75° × 75°	Dispersion (H × V): 75° × 75°
低音单元: 12"铁氧体单元, 3"音圈	LF Unit: 12" ferrite magnet, 3" voice coil
高音单元: 1.4"钕磁PEN压缩同轴单元, 1.75"音圈	HF Unit: 1.4" neodymium PEN film compression unit, 1.75" voice coil
保护: 高音保护	Protection: Tweeter protection
输入接口: 1 × Neutrik NL-4 pins +1 / -1 input pins +2 / -2 THRU	Input interface: 1× Neutrik NL-4 pins +1 / -1 input pins +2 / -2 THRU
吊挂系统: 18个M8吊挂点	Rigging system: 18× M8 rigging point
箱体材料/喷漆: 15 mm多层板 / 水性漆	Cabinet material / Coating: 15 mm selected plywood / Water borne texture coating
尺寸 (W × H × D): 370 × 520 × 350 mm	Dimensions (W × H × D): 370 × 520 × 350 mm
净重: 21.5 kg	Net weight: 21.5 kg
可选附件: 见附件页面	Available accessory: See accessories page